



VD 2105-2

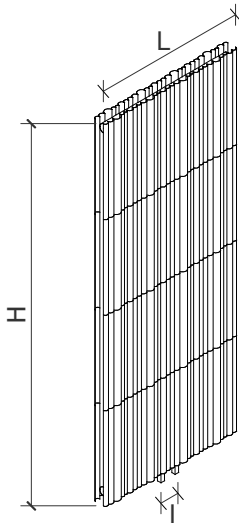


PROFONDEUR

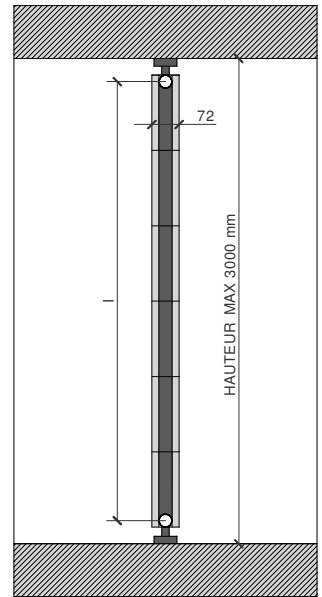


HAUTEUR (mm)	Entraxe sur demande "SCHEMA C"	POIDS (Kg)	Puissance $\Delta T 50^\circ C$ Watt	Dimensions des fixations S (mm)	Distance entrée/sortie et mur L (mm)	Profondeur totale (fixations incluses) M (mm)
300	265	1,36	95	10	46	82
600	565	2,36	192	30	66	102
900	865	3,26	289	40	76	112
1200	1165	4,16	386	50	86	122
1500	1465	5,06	483	LARGEUR PAR ÉLEMENTS (mm)		
1800	1765	5,96	580	151		
2100	2065	6,86	677			
2400	2365	7,76	774			

MODALITÉ D'INSTALLATION


- E = entrée
- U = sortie
- ▲ D = diaphragme
- S = purgeur
- I = entraxe

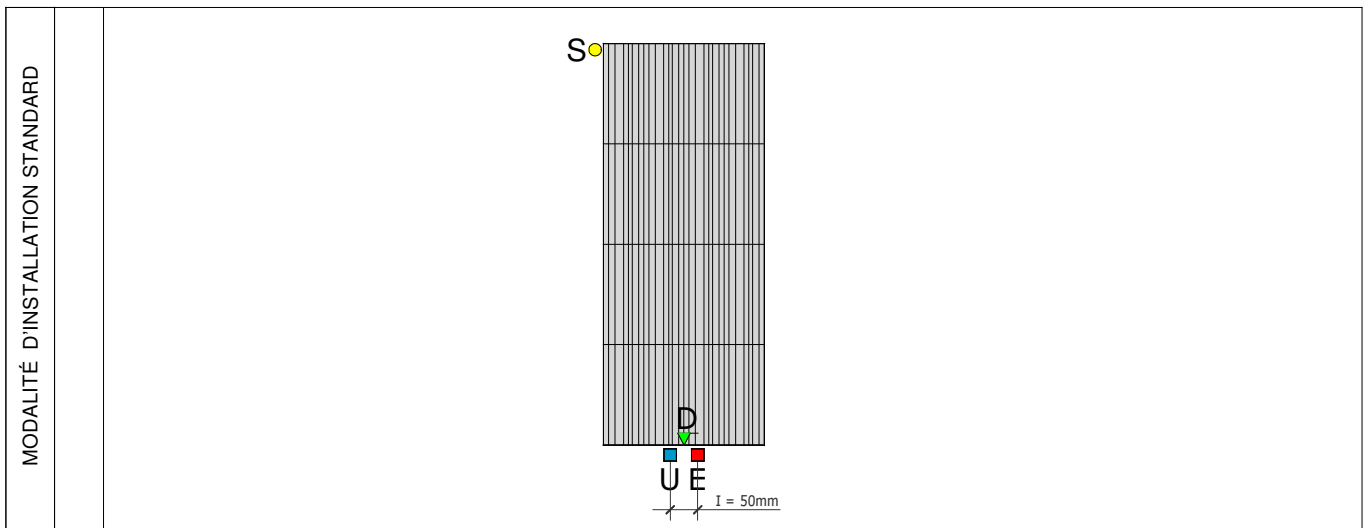


INSTALLATION SPECIALE SUR DEMANDE **A**

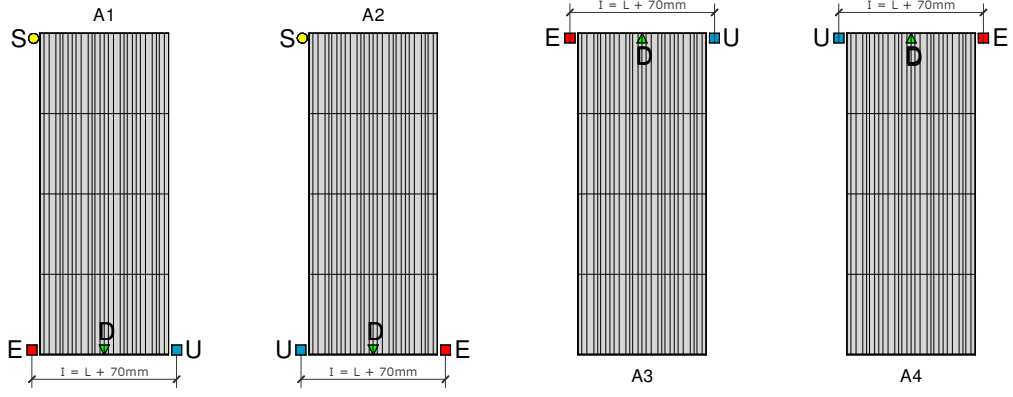


INSTALLATION SPECIALE SUR DEMANDE **B**

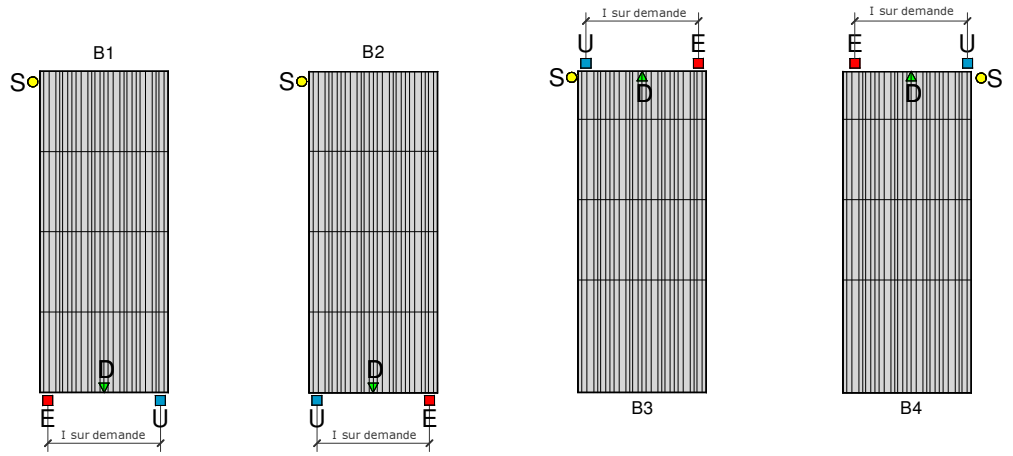

INSTALLATION SPECIALE SUR DEMANDE **C**

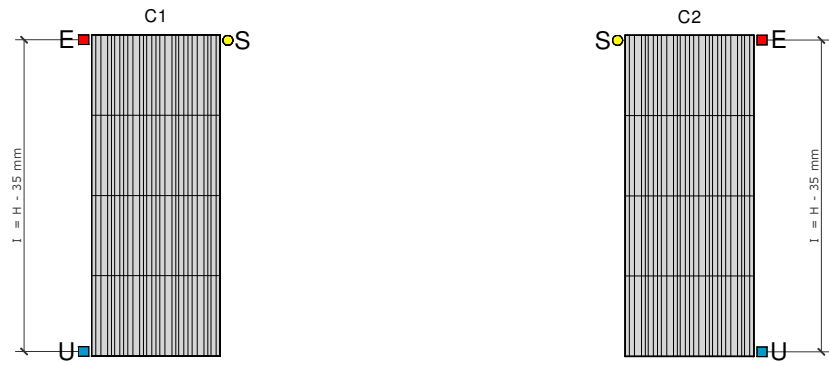


INSTALLATION AVEC RACCORDS MONOTUBE

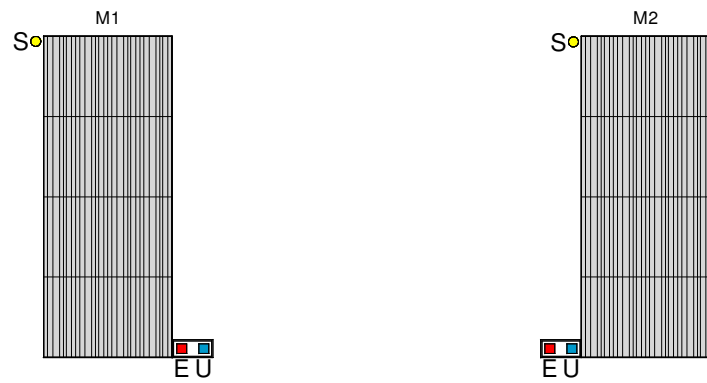


VERSION ELECTRIQUE

CONFIGURATIONS POSSIBLES


A

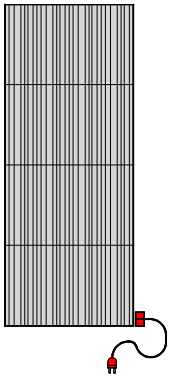

B

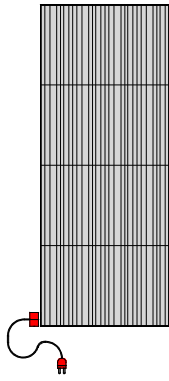

C

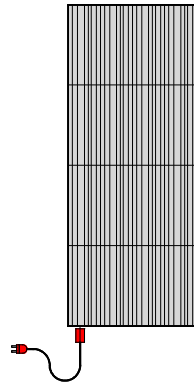

D

