




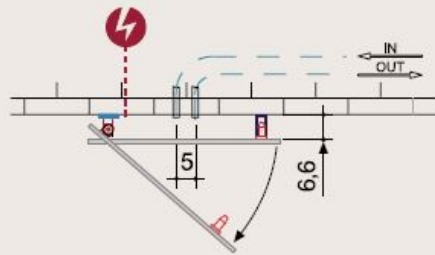
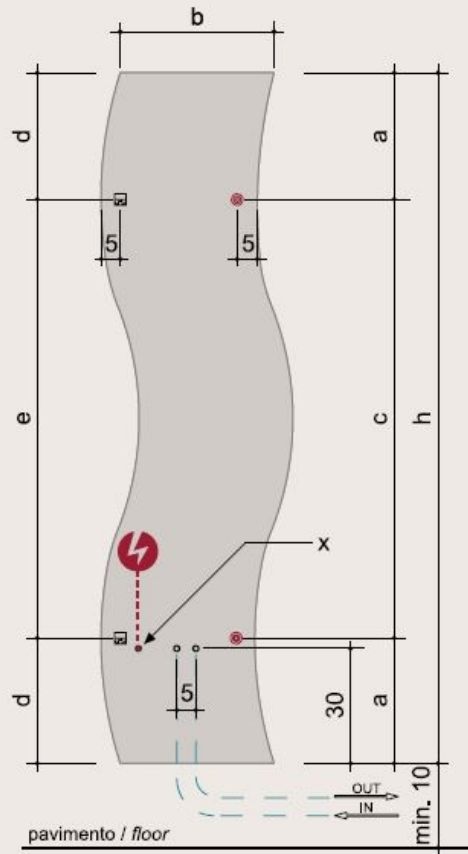


VD 1118

hxb (cm)	n numero elementi/ elements number	peso a vuoto / weight empty (kg)	volume d'acqua / water volume (dm ³)	a (cm)	c (cm)	d (cm)	e (cm)	Qs resa termica / thermal yield Δt 50°C (watt)	Q potenza elettrica / electrical power (watt)	versione mista* / combined version*	apribile**/ opening**	apribile / opening
												
verticale/vertical												
120,0x40,0	1	21,0	0,22	33,0	114,0	33,0	114,0	772	750	•	-	•
180,0x50,0	1	26,0	0,34	33,0	114,0	33,0	114,0	941	930	•	-	•
200,0x60,0	1	33,0	0,47	43,0	114,0	43,0	114,0	1201	1200	•	-	•
orizzontale/horizontal												
40,0x120,0	1	21,0	0,22	33,0	114,0	33,0	114,0	772	750	•	•	-
50,0x180,0	1	26,0	0,34	33,0	114,0	33,0	114,0	941	930	•	•	-
60,0x200,0	1	33,0	0,47	43,0	114,0	43,0	114,0	1201	1200	•	•	-



Istallazione verticale
Vertical installation



Istallazione orizzontale
Horizontal installation

