



VD 1326-1

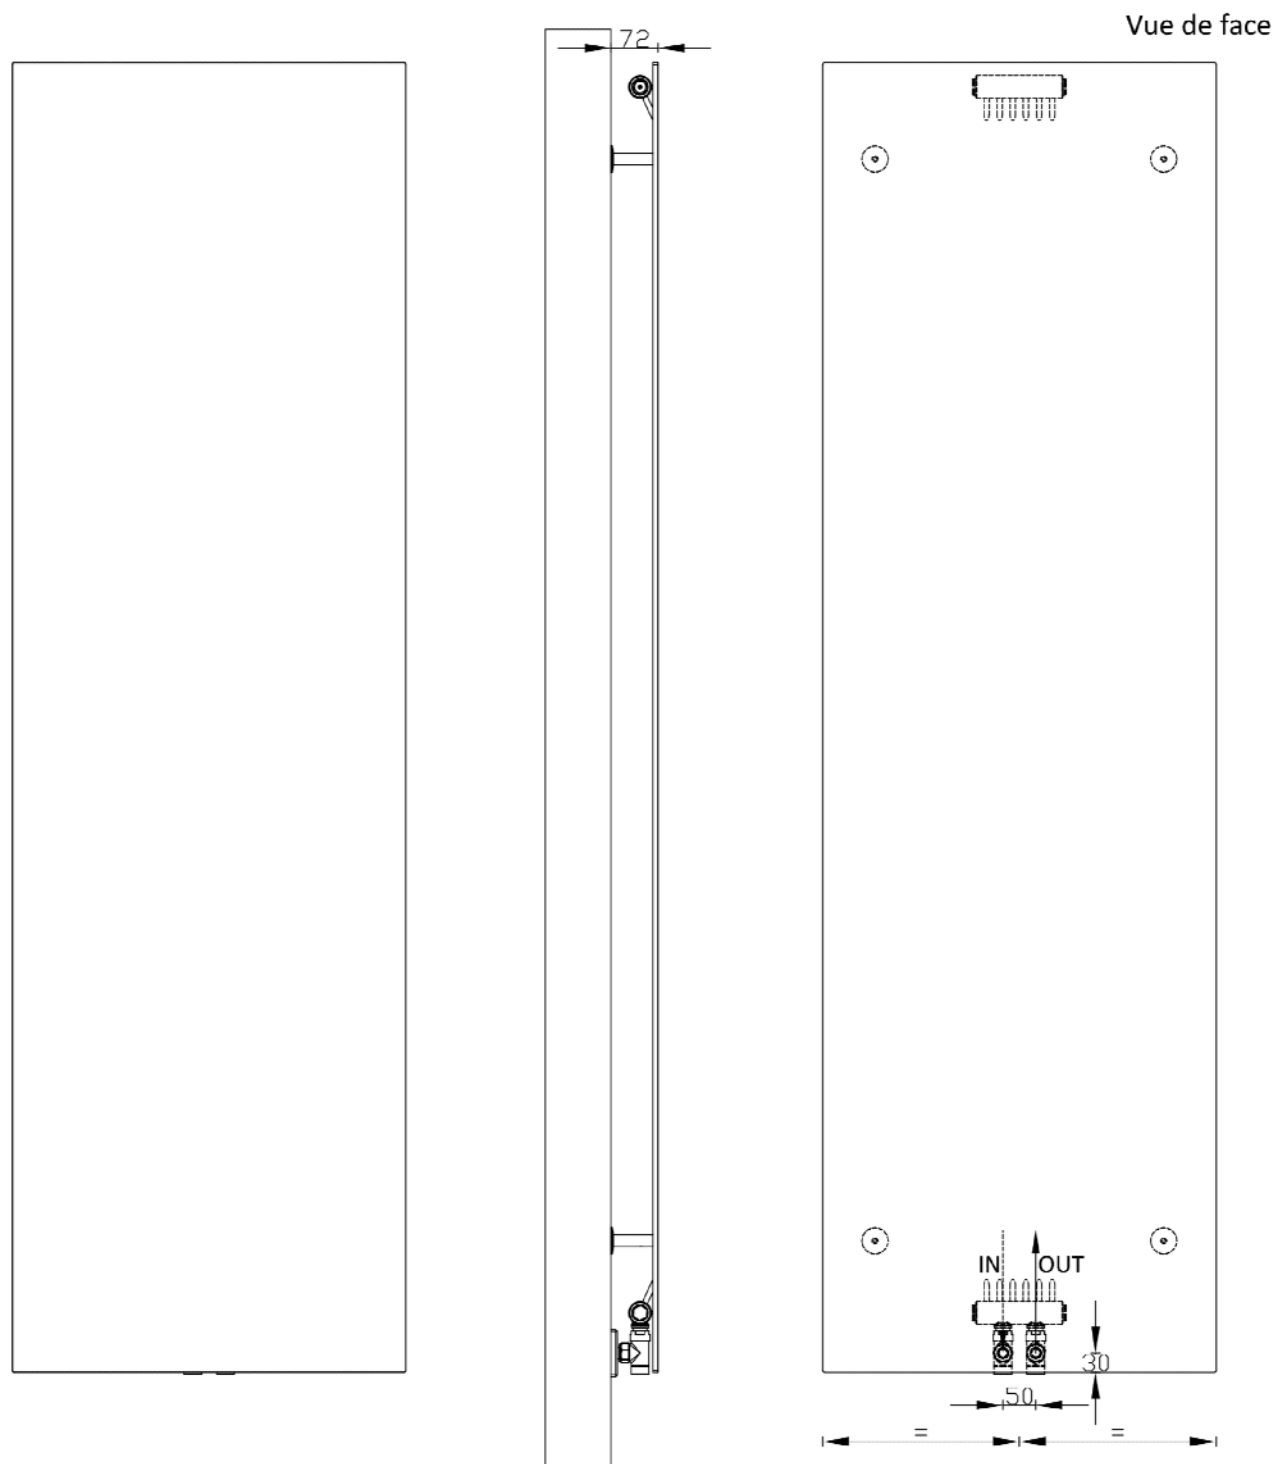

Version chauffage central

Hauteur mm.	Largeur mm.	Puissance Watt $\Delta T 50^\circ$	Contenu H2O	Poids
1200	500	550	0.77	13
1200	600	660	0.79	16
1200	800	880	0.81	21
1500	500	687	0.83	17
1500	600	825	0.85	20
1500	800	1100	0.87	26
1800	500	825	0.90	20
1800	600	990	0.92	24
1800	800	1320	0.94	32
2000	500	917	0.95	22
2000	600	1100	0.97	26
2000	800	1470	0.99	35

Vue de face

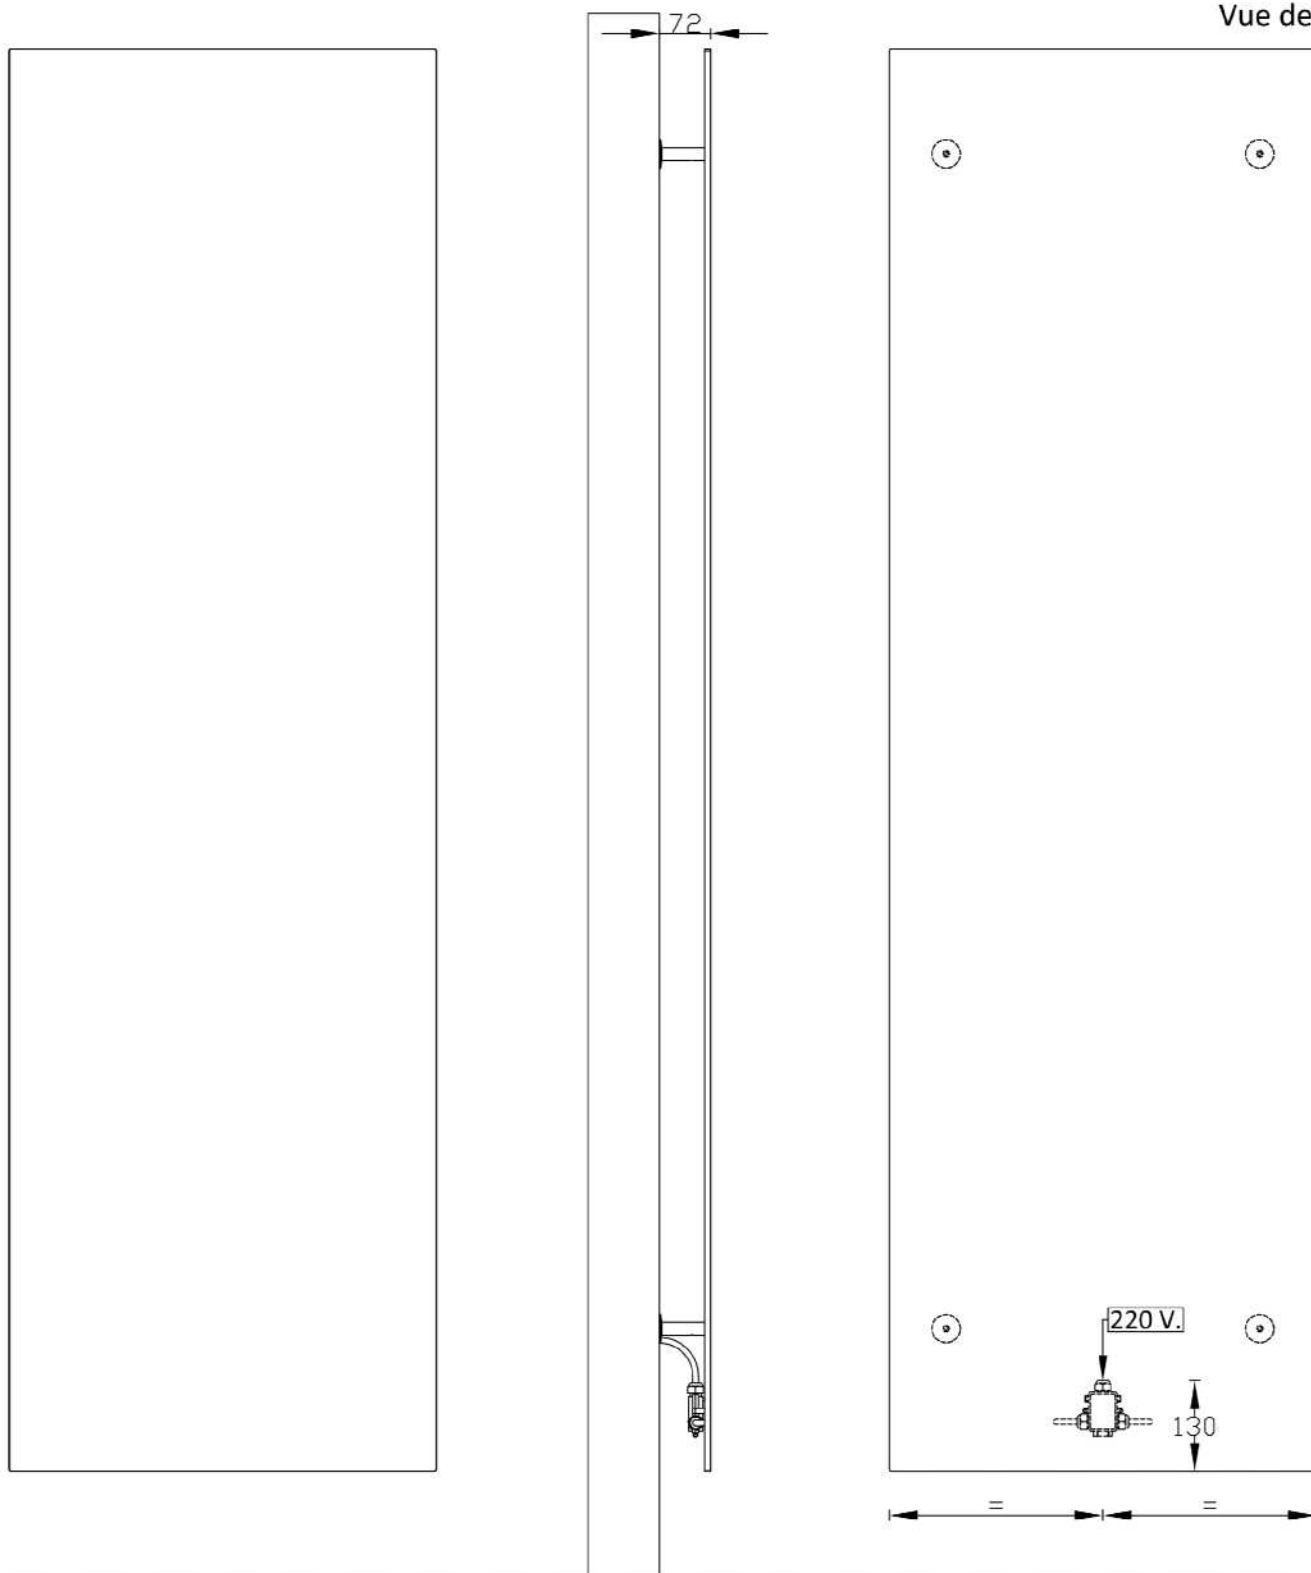


Version électrique

Hauteur mm.	Largeur mm.	Puissance Watt	Poids
1200	500	550	12
1200	600	660	15
1200	800	880	20
1500	500	687	16
1500	600	825	19
1500	800	1100	25
1800	500	825	19
1800	600	990	23
1800	800	1320	31
2000	500	917	21
2000	600	1100	25
2000	800	1470	34

VD 1326-2


Vue de face

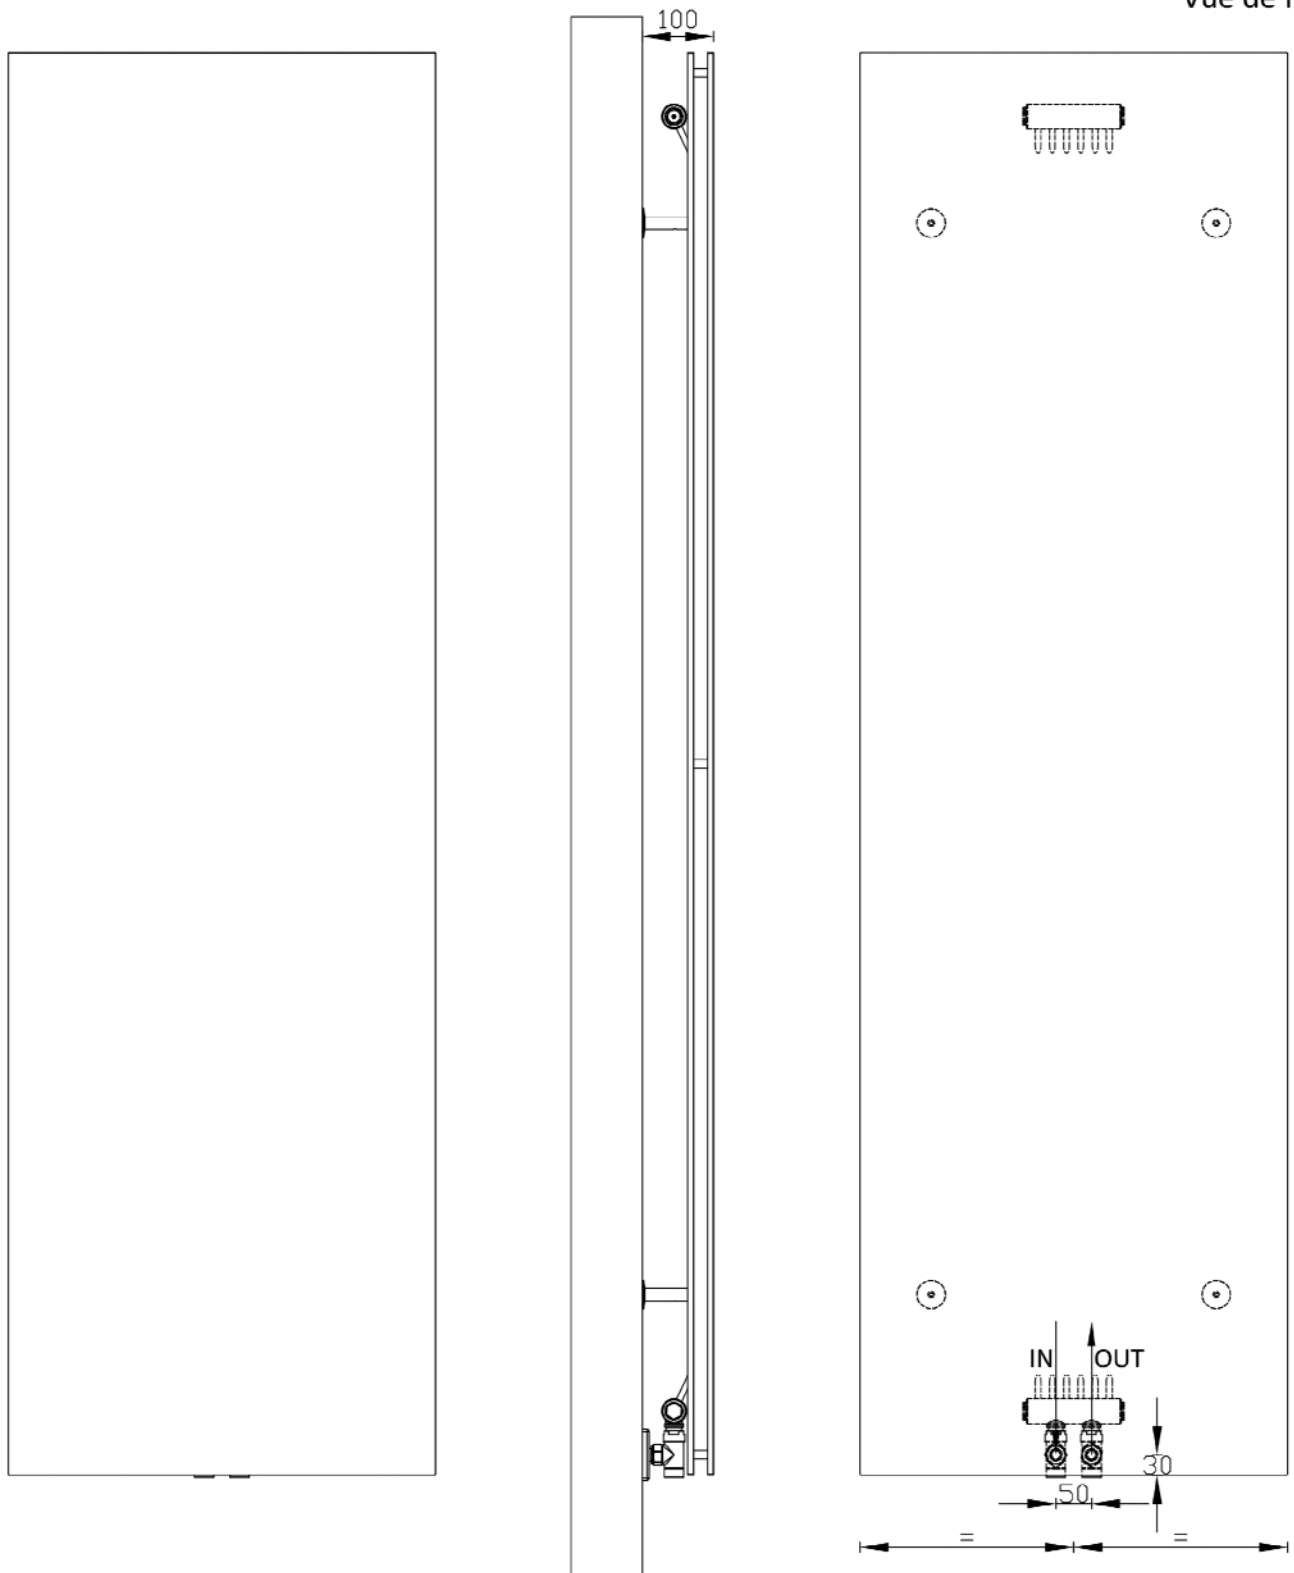

Version chauffage central

Hauteur mm.	Largeur mm.	Puissance Watt $\Delta T 50^\circ$	Contenu H2O	Poids
1200	600	1190	1.5	35
1500	600	1485	1.7	42
1800	600	1780	1.8	50
2000	600	1980	2.0	55

Vue de face

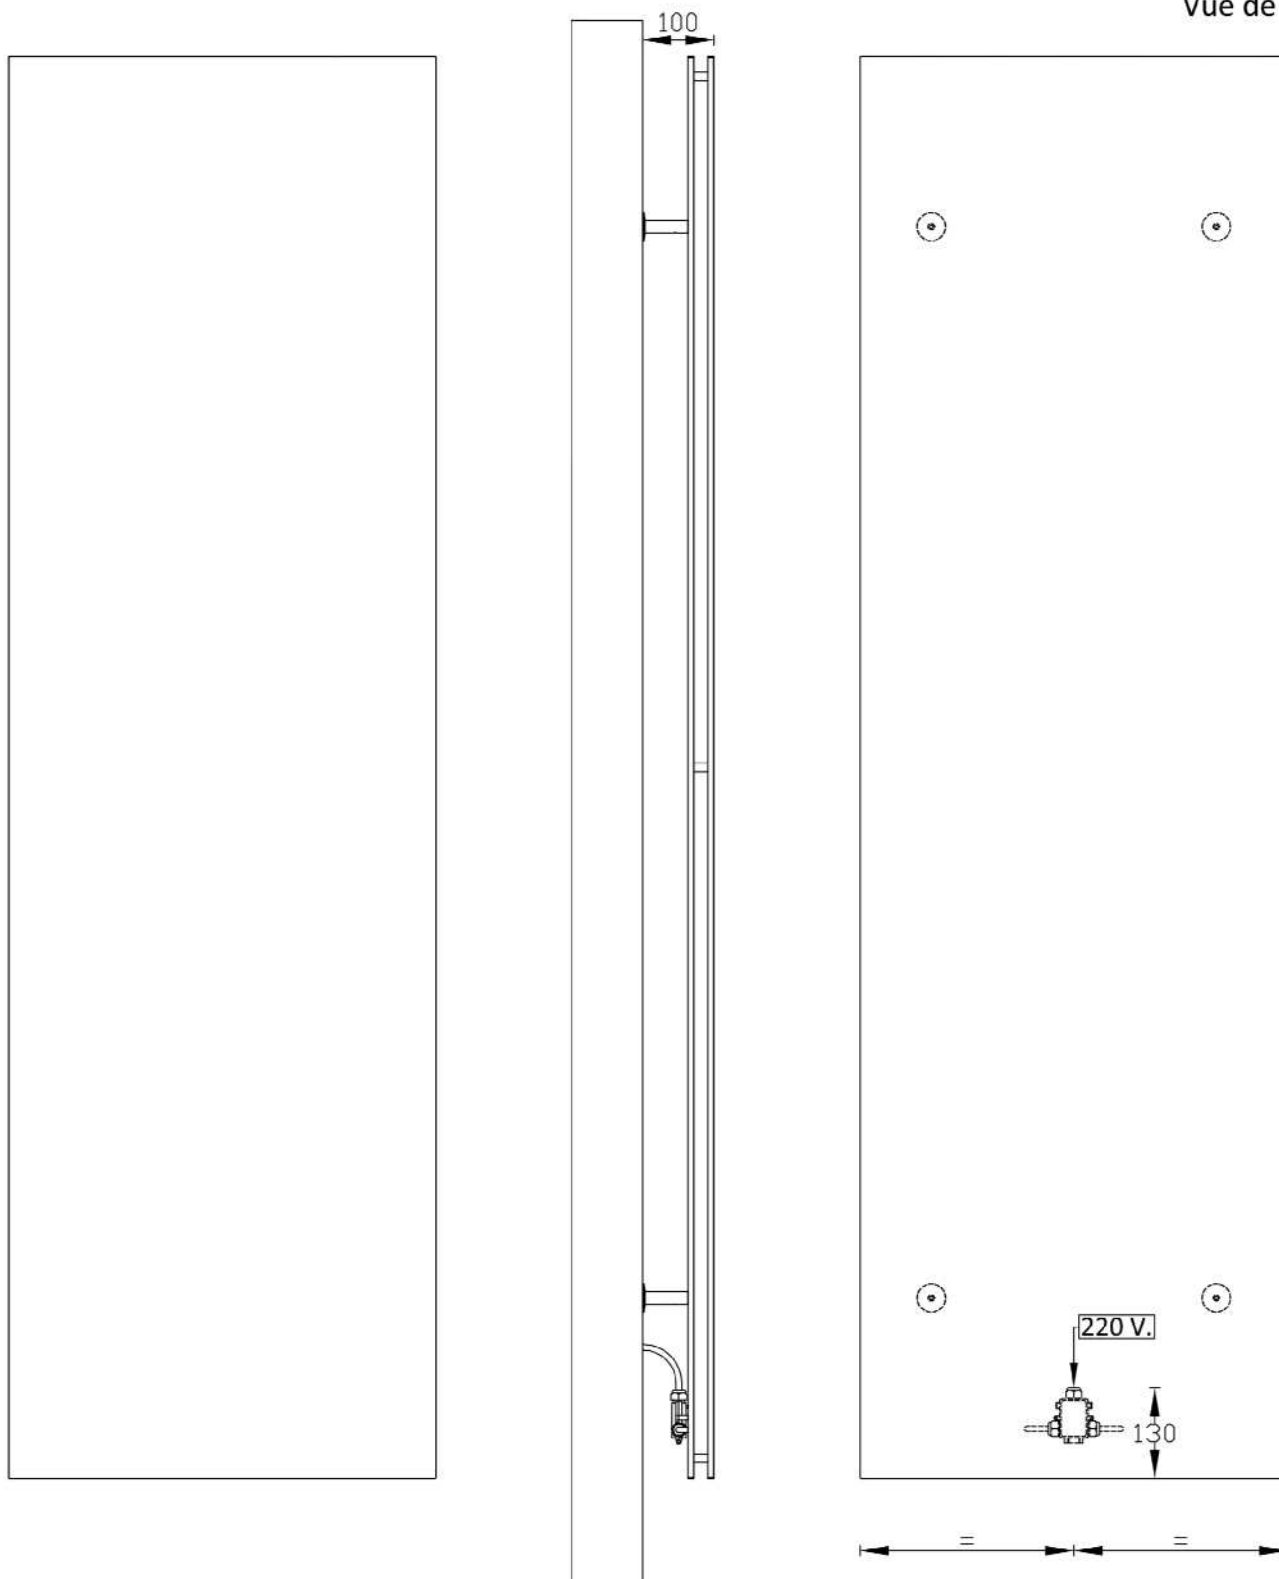

Version électrique

Heuteur mm.	Largeur mm.	Puissance Watt	Poids
1200	600	1190	33
1500	600	1485	40
1800	600	1780	48
2000	600	1980	53

Prédisposition

